



CARTEC 60 LIFTING ACCESSORIES


A series of grade 60 stainless steel products for safe handling also in shipping environments, food industry companies or wherever the use of

stainless steel is required: these go to complete the CARTEC brand of accessories on offer for every sectoral application.

CARTEC 60


C6XCM
GR. 60 STAINLESS STEEL OBLONG MASTERLINK

Chain		Code	Size			Weight W.L.L.	
⊥ ø mm	Λ ø mm		D mm	P mm	L mm	Kg	Kg
6-7	6	C6XCM0706	13	110	60	0,34	1600
8	---	C6XCM08	13	110	60	0,34	1600
10	7/8	C6XCM1008	16	110	60	0,53	2600
13	10	C6XCM1310	18	135	75	0,8	4250
16	13	C6XCM1613	22	160	90	1,5	6300
18	16	C6XCM1816	26	180	100	2,3	8900

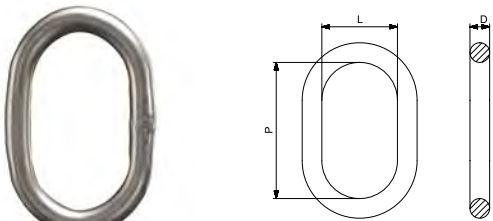


C6XCMC
GR. 60 STAINLESS STEEL SUB-ASSEMBLY

Chain		Code	Size						Weight W.L.L.	
⤴ ø mm			D mm	P mm	L mm	D1 mm	P1 mm	L1 mm	Kg	Kg
6		C6XCMC06	13	110	60	10	44	20	0,52	1890
7		C6XCMC07	16	110	60	13	54	25	0,97	2600
8		C6XCMC08	18	135	75	16	70	34	1,6	3350
10		C6XCMC10	22	160	90	18	85	40	2,76	5250
13		C6XCMC13	26	180	100	22	115	50	4,45	8900
16		C6XCMC16	32	200	110	26	140	65	7,55	13200

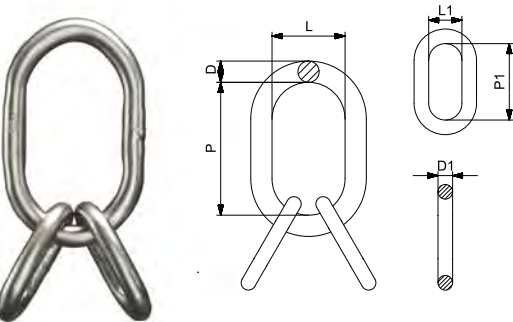


C6XCL
GR. 60 STAINLESS STEEL CONNECTING LINK

Chain		Code	A	C	O	R	P	S	Weight W.L.L.	
mm	inch		mm	mm	mm	mm	mm	mm	Kg	Kg
6	1/4	C6XCL06	14	18	18	45	8	7,5	0,08	900
7	9/32	C6XCL07	18	20	20,5	50,5	10,2	9	0,14	1250
8	5/16	C6XCL08	19	25,5	23,5	62	11,5	10	0,2	1600
10	3/8	C6XCL10	24	30	27,5	72	12,6	12,6	0,35	2500
13	1/2	C6XCL13	28	36	33,5	87,5	19	16,7	0,73	4250
16	5/8	C6XCL16	34,5	40,5	39,5	105	20,6	20,6	1,47	6300

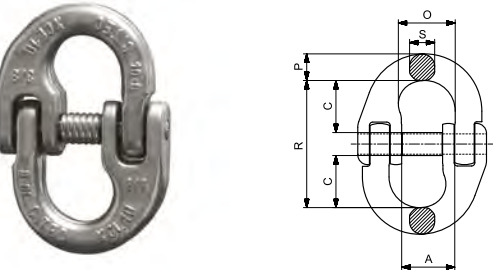

C6XSH
STAINLESS STEEL DEE SHACKLE


Code	A	B	C	D	E	F	M	Weight W.L.L.	
	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
C6XSH005	18	34	18	9	8	33	M10	0,07	500
C6XSH012	25	49	25	13	12	40	M14	0,22	1250
C6XSH020	32	64	32	17	16	60	M18	0,52	2000
C6XSH032	41	79	47	21	19	78	M22	0,8	3200
C6XSH050	56	106	60	29	25	109	M30	2,2	5000
C6XSH130	76	144	75	40	34	152	M39	7	13000

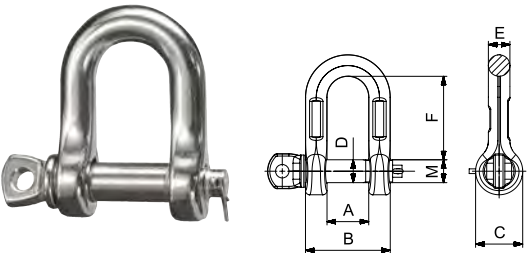

CARTEC 60

C6X807 H.T.
GR. 60 STAINLESS STEEL H.T. ROTATING EYEBOLT

Code		Size	A	B	C	D	E	F	K	L	CH	Weight W.L.L.	
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg	t
C6X807HT12	M12	43	12,5	11,5	30	30	36,5	55,5	18	8	0,2	0,5	
C6X807HT16	M16	49,5	14,5	15,7	35	35	41,8	64,5	24	10	0,35	1	
C6X807HT20	M20	58	16	18	40	42	51,5	74,5	30	12	0,6	2	
C6X807HT24	M24	69	20,5	22	49	50	58	90	36	12	1	2,5	

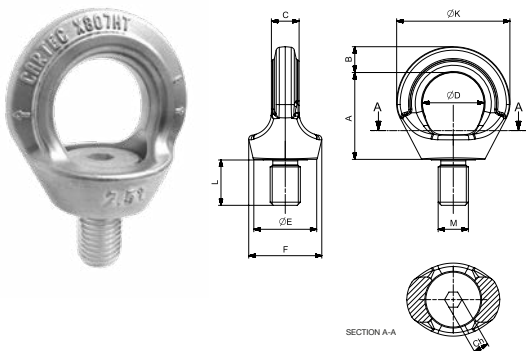


C6XCA
GR. 60 STAINLESS STEEL SLING HOOK WITH LATCH

Chain		Code	A	B	D	G	H	O	R	S	Weight W.L.L.	
mm	inch		mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
5-6	7/32 - 1/4	C6XCA06SF	23	72	8	13,5	21	21	90	8	0,31	900
7-8	9/32 - 5/16	C6XCA08SF	32	103	13	19,5	29	27	118	13	0,81	1600
10	3/8	C6XCA10SF	39	120	15	27	33	37	140	15	1,57	2500
13	1/2	C6XCA13SF	51	155	18	35	46	48	182	18	3,09	4250
16	5/8	C6XCA16SF	66	183	24	44	51	55	213	24	5,36	6300




C6XCB
GR. 60 STAINLESS STEEL CLEVIS SLING HOOK

Chain		Code	A	B	C	G	H	R	PxL	Weight	W.L.L.
mm	inch		mm	mm	mm	mm	mm	mm	mm	Kg	Kg
6	1/4	C6XCB06SF	23	7,2	8,5	13,5	21	81	8x19,5	0,33	900
7	9/32	C6XCB07SF	32	9,5	12	19,5	29	112	8x22,5	0,79	1250
8	5/16	C6XCB08SF	32	9,5	11	19,5	29	111	10x22,5	0,84	1600
10	3/8	C6XCB10SF	39	12	15	27	33	122,5	13x31,5	1,43	2500

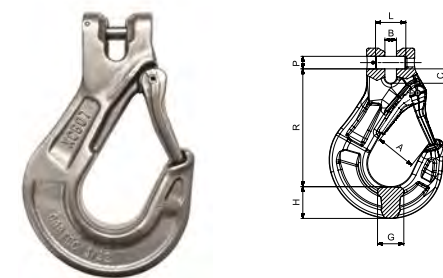

C6XAC
GR. 60 STAINLESS STEEL SHORTENING CLUTCH

Chain		Code	A	B	C	D	E	S	Weight W.L.L.	
ø mm	ø inch		mm	mm	mm	mm	mm	mm	Kg	Kg
5-6	7/32 - 1/4	C6XAC06	55	8	81	26	16	8,5	0,25	900
7-8	9/32 - 5/16	C6XAC08	71	11	110	34	22	10,5	0,59	1600
10	3/8	C6XAC10	90	12	135	40	26	13	1,13	2500
13	1/2	C6XAC13	112	17	170	52	32	16,5	2,37	4250
16	5/8	C6XAC16	135	20,5	202	64	38	20	4,12	6300

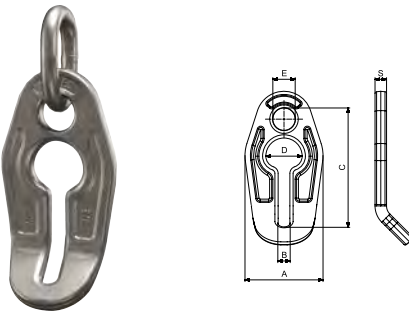


CARTEC 60

C6XC8182

GR. 60 STAINLESS STEEL CHAIN

Chain	Code	P	Tolerance	Li min	Le max	W.L.L. B.F.		Weight
ø mm ø inch		mm	mm	mm	mm	Kg	KN	Kg/mt
6	1/4	C6XC818206	18	± 0,5	7,8	22,2	900 35,3	0,8
7	9/32	C6XC818207	21	± 0,6	9,1	25,9	1250 49,1	1,1
8	5/16	C6XC818208	24	± 0,7	10,4	29,6	1600 62,8	1,4
10	3/8	C6XC818210	30	± 0,9	13	37	2500 98,1	2,2
13	1/2	C6XC818213	39	± 1,2	16,9	48,1	4250 166,8	3,8
16	5/8	C6XC818216	48	± 1,4	20,8	59,2	6300 247,3	5,7

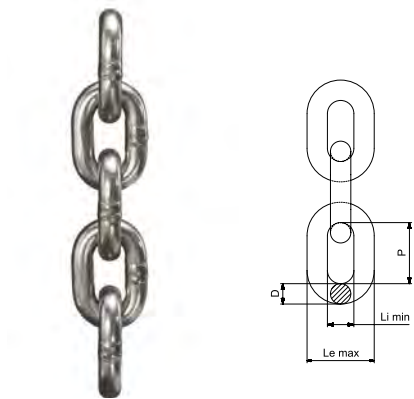

CARTEC 60

C6XTI

IDENTIFICATION TAG

Tag	Tag
1 leg	2/3/4 legs
XTI01	XTI02



Working load limit of slings - W.L.L. according to EN 818-4

Chain	Single leg		2 legs	3-4 legs		Choked slings
						
Pulling angle	1 0°	1,4	1 45°<β≤ 60°	2,1 0°<β≤ 45°	1,5 45°<β≤ 60°	1,6
mm	Kg	Kg	Kg	Kg	Kg	Kg
6	900	1250	900	1890	1350	1440
7	1250	1750	1250	2600	1850	2000
8	1600	2200	1600	3350	2400	2500
10	2500	3500	2500	5250	3750	4000
13	4250	5950	4250	8900	6350	6800
16	6300	8800	6300	13200	9400	10000

C6XPMP

GR. 60 STAINLESS STEEL CHAIN FOR PUMPS

Chain		Code	Master Link (A link)			Welding Link (B link)			W.L.L.	Weight
ø mm	ø inch		D mm	P mm	L mm	D1 mm	P1 mm	L1 mm	Kg	Kg/mt
4	5/32	C6XPMP04	7,7	70	35	4	16	7	400	0,35
5	13/64	C6XPMP05	10	80	50	7	35	16	630	0,7
6	1/4	C6XPMP06	13	110	60	8	35	16	900	1,1
7	9/32	C6XPMP07	13	110	60	8	35	16	1250	1,3
8	5/16	C6XPMP08	13	110	60	10	44	20	1600	1,8
10	3/8	C6XPMP10	16	110	60	13	54	25	2500	3
13	1/2	C6XPMP13	22	160	90	16	70	34	4250	11
16	5/8	C6XPMP16	26	180	100	20	85	40	6300	17

